

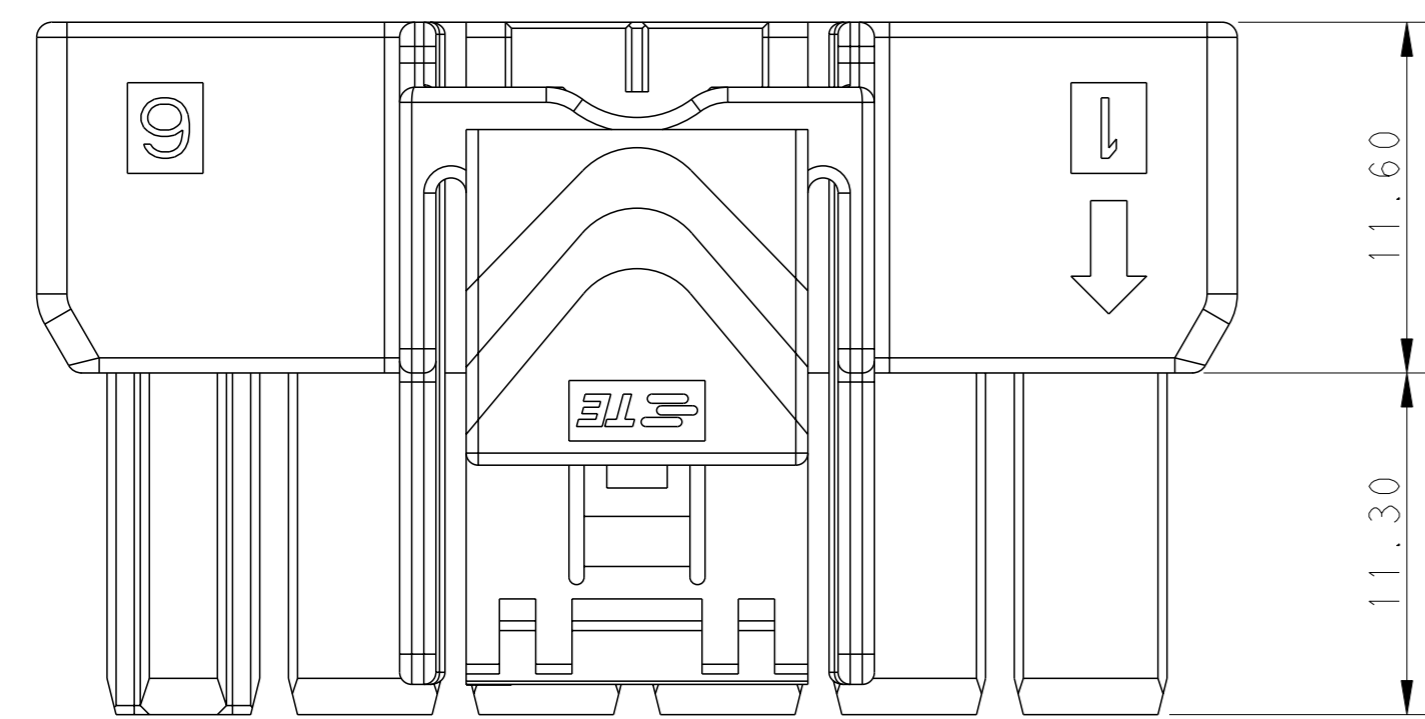
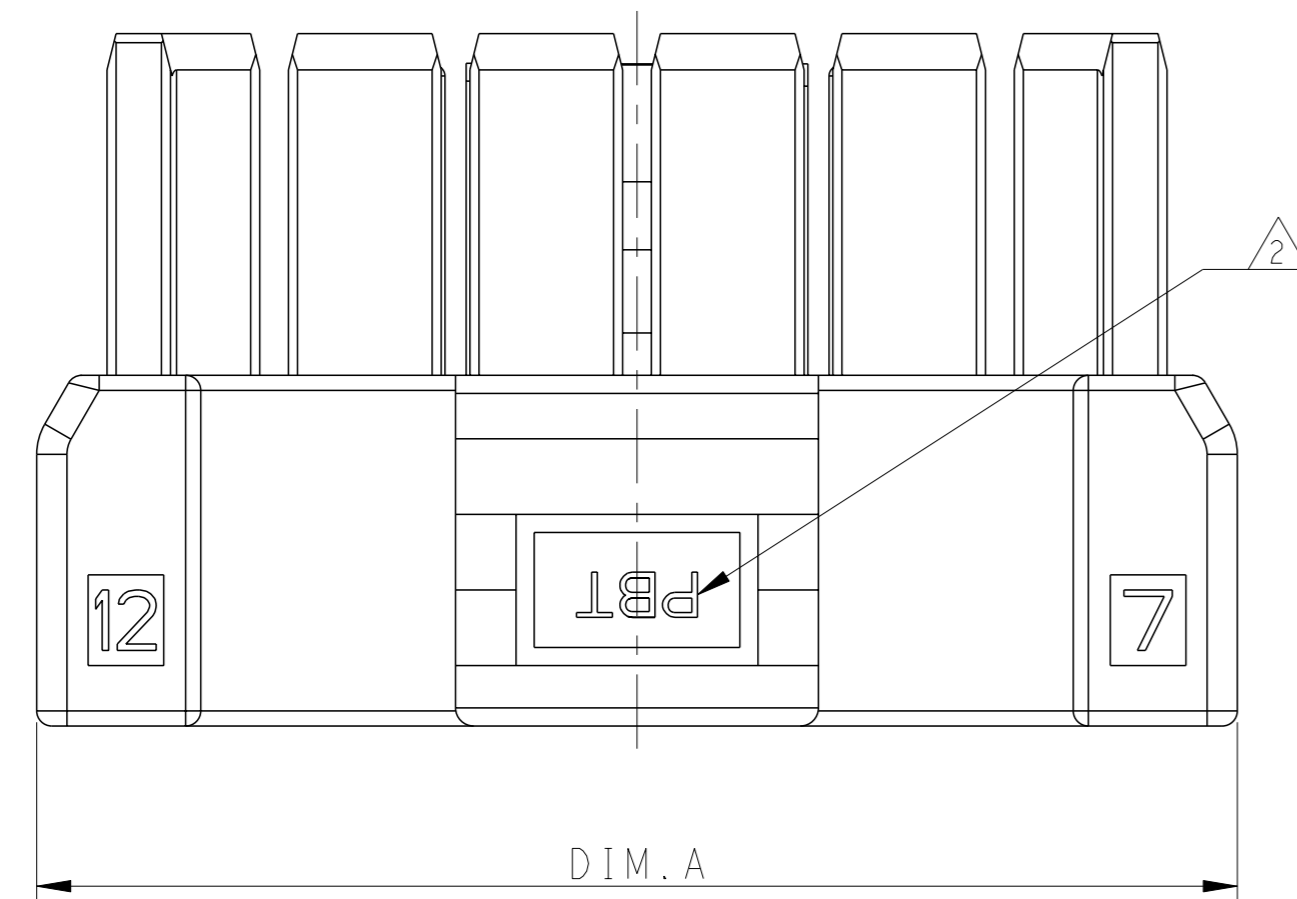
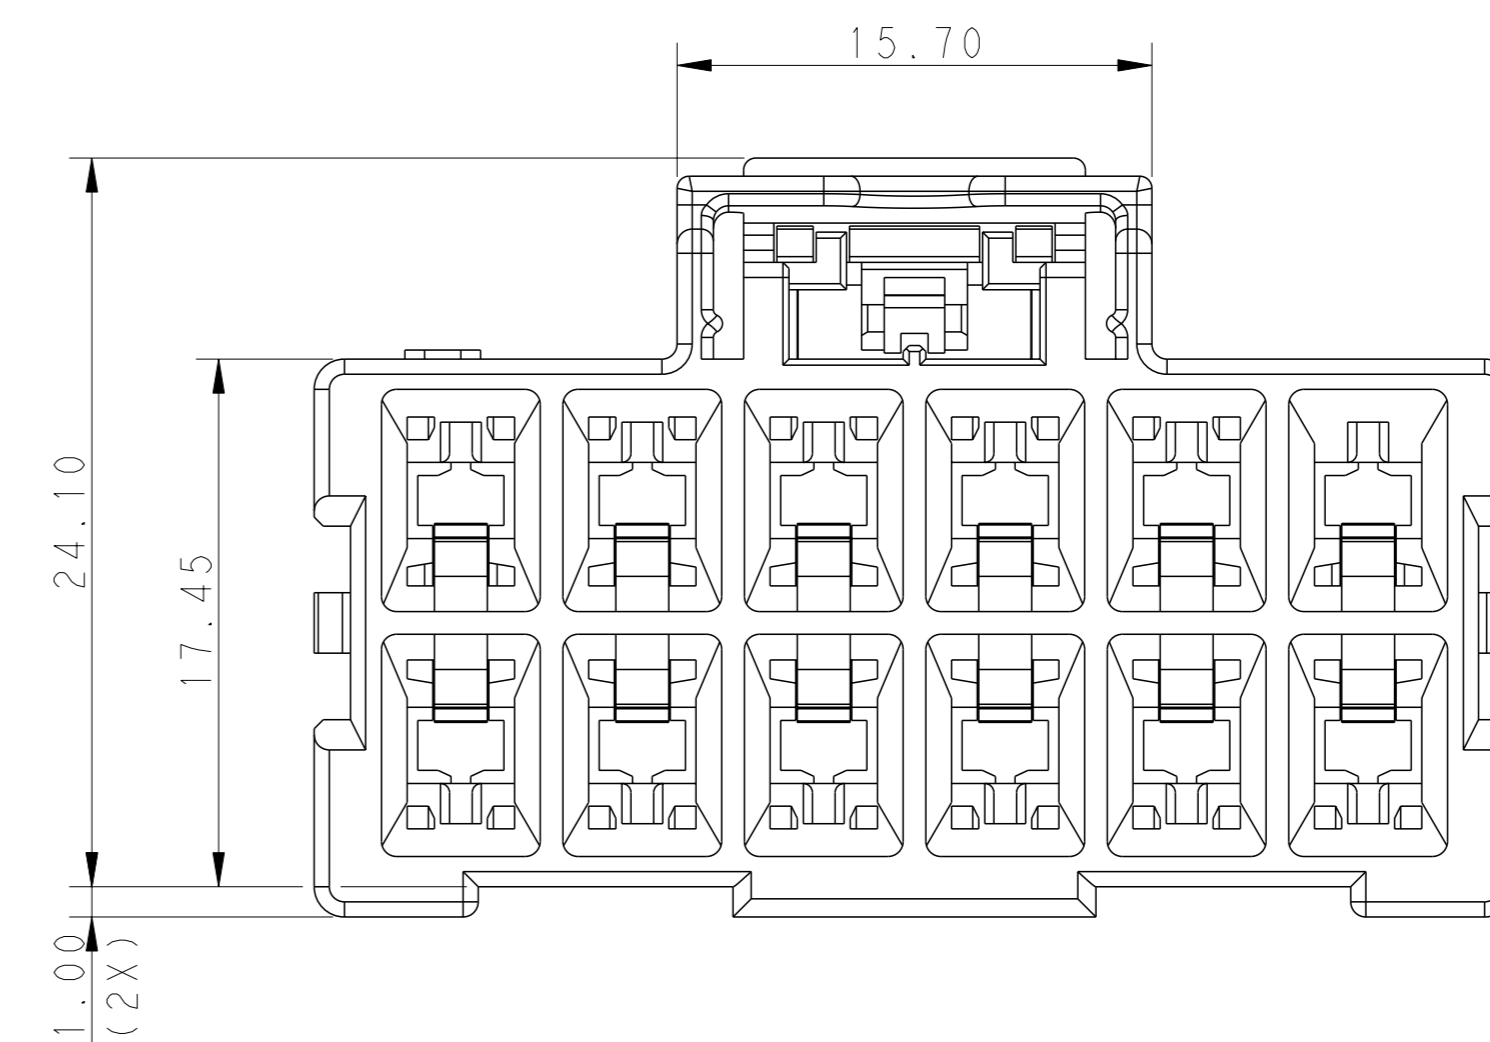


REVISIONS						
LOC	DIST	REV	DESCRIPTION	DATE	OWN	APVD
-	-	D	REVISED PER ECO-16-009784	30JUN16	RS	GJ

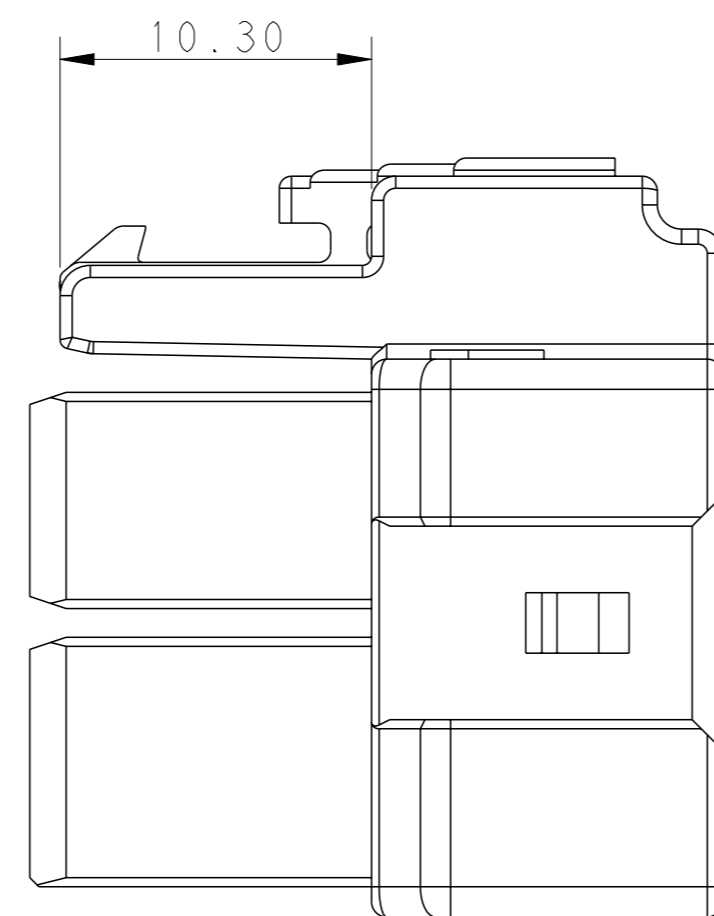

POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

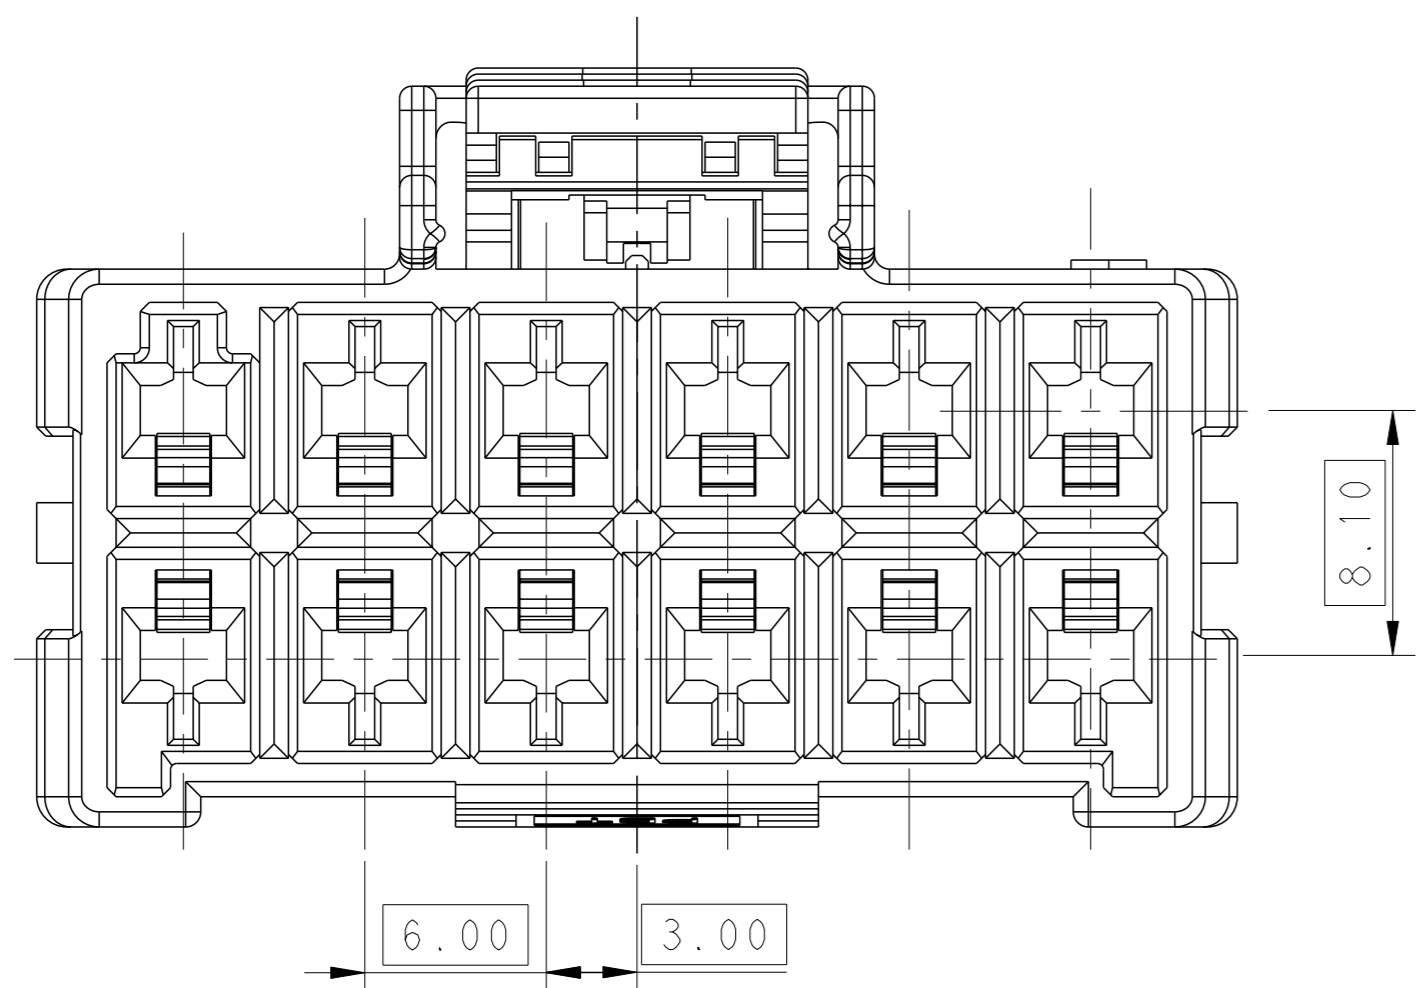

1 MATERIAL:
 LEVEL 1:PBT,STANDARD TEMPERATURE 105°C
 KEY A:NATURAL; KEY B:PURPLE; KEY C:BLUE; KEY D:YELLOW
 LEVEL 2:NYLON,HIGH TEMPERATURE 150°C
 KEY A:LIGHT GREY; KEY B:RED; KEY C:BLACK; KEY D:NATURAL

2 MATERIAL MARK:
 LEVEL 1:PBT,LEVEL 2:HDT



3 APPLICABLE CONTACT P/N
 RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-*, 2238066-*

4 MATING CONN, P/N
 CAP HSG: *-1971774/5-
 TPA (LOCKING PLATE): *-1971778-*



5 This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN TOMMY WU 09JUL2012	TE Connectivity
DIMENSIONS: mm		CHK HAPYE WU 09JUL2012	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD YIHONG MAO 09JUL2012	NAME
0 PLC ±	1 PLC ±0.35	PRODUCT SPEC	PLUG HOUSING, DOUBLE ROW
2 PLC ±0.25	3 PLC ±	APPLICATION SPEC	POWER TRIPLE LOCK
4 PLC ±	ANGLES ±	SIZE	114-106118
FINISH		CAGE CODE	108-106118
		DRAWING NO	114-106118
		RESTRICTED TO	
		WEIGHT	A1 00779C=1971776
		Customer Drawing	SCALE 4:1 SHEET 1 OF 2 REV D



LOC	DIST	REVISIONS			
P	LYR	DESCRIPTION	DATE	OWN	APVD
-	-	SEE SHEET 1	-	-	-

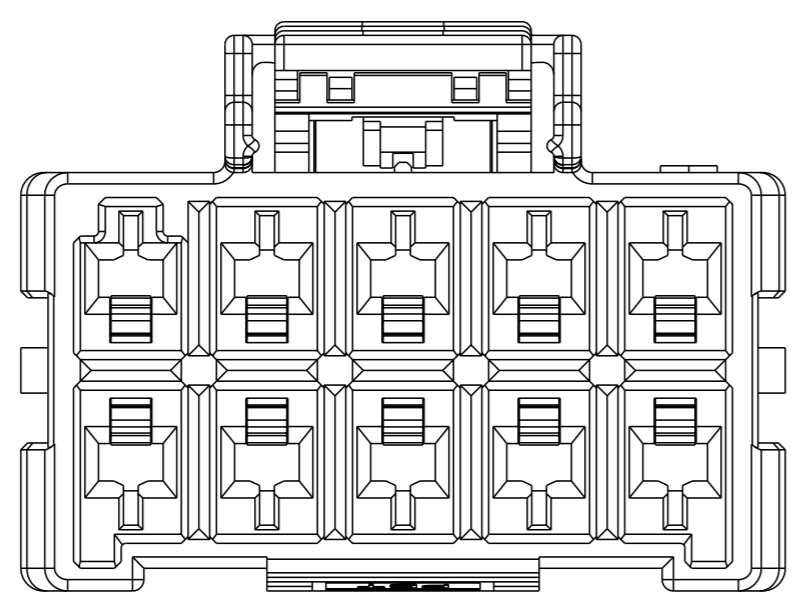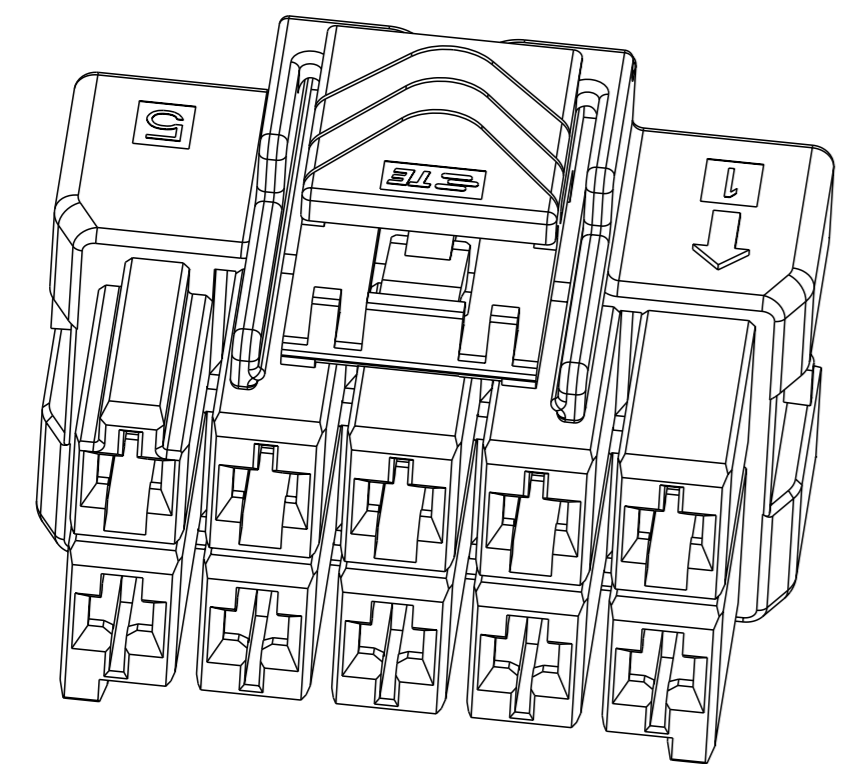


2*5 POSITIONS

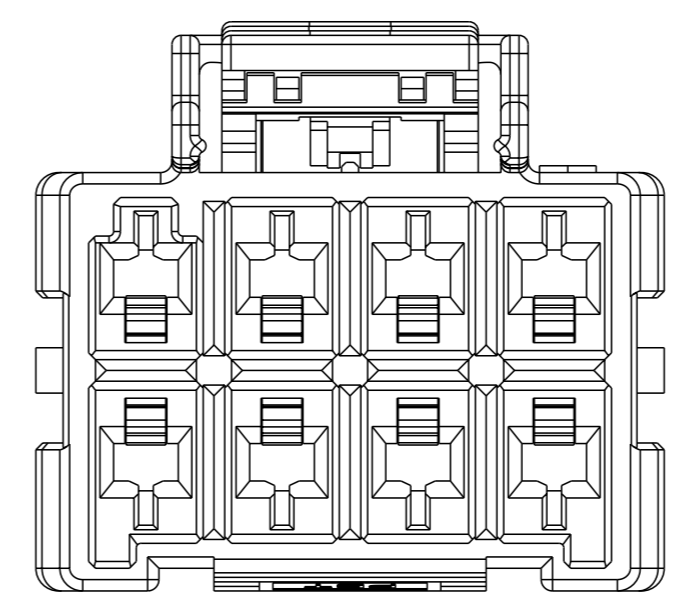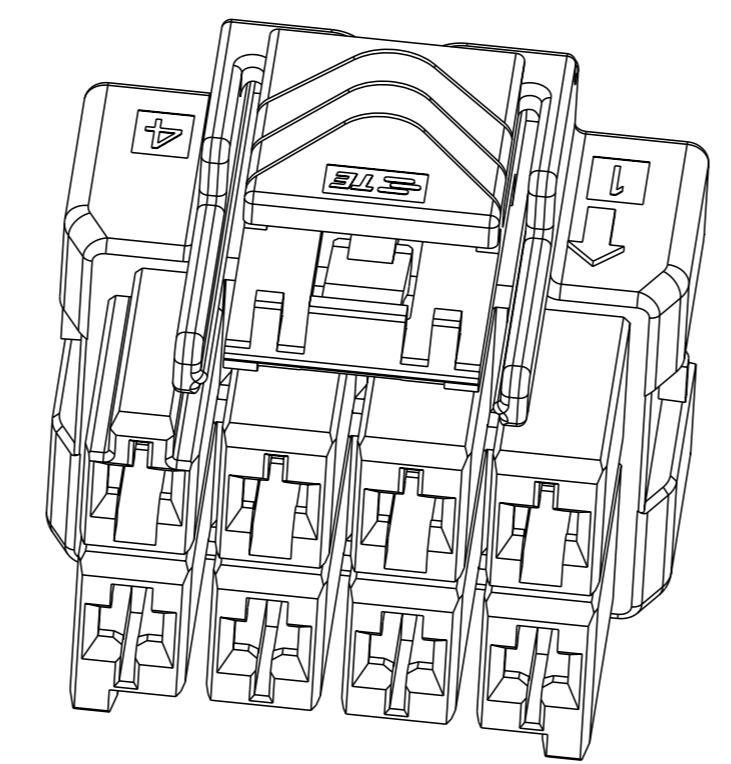


2*4 POSITIONS

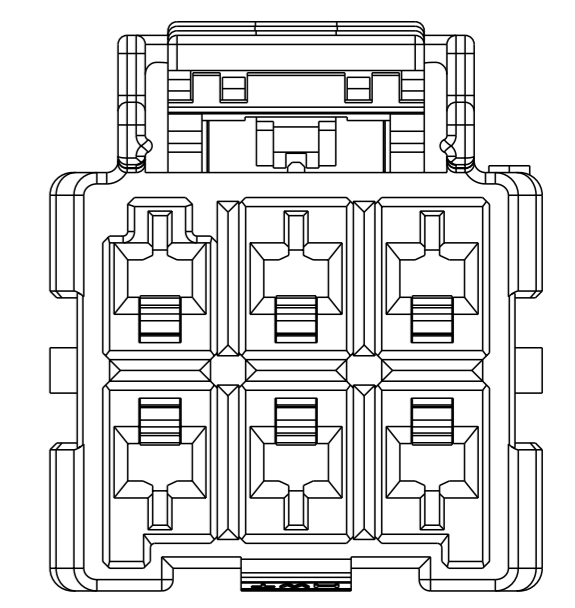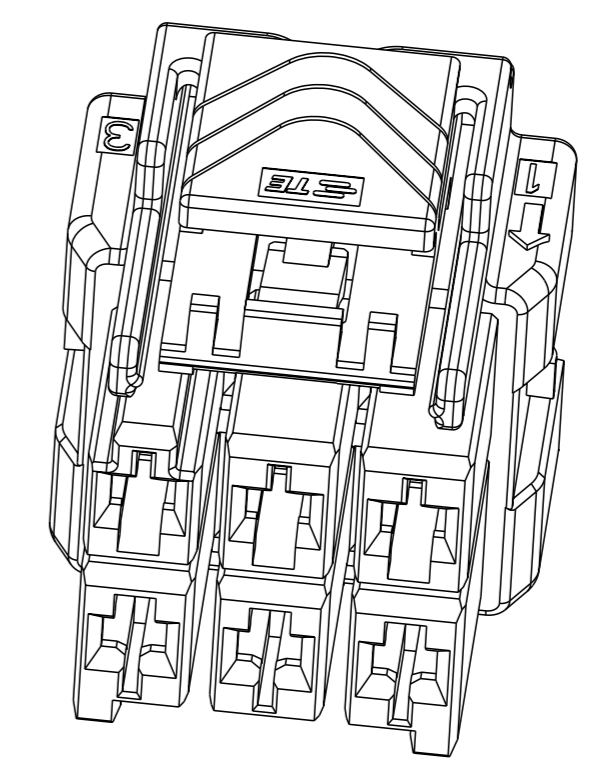


2*3 POSITIONS

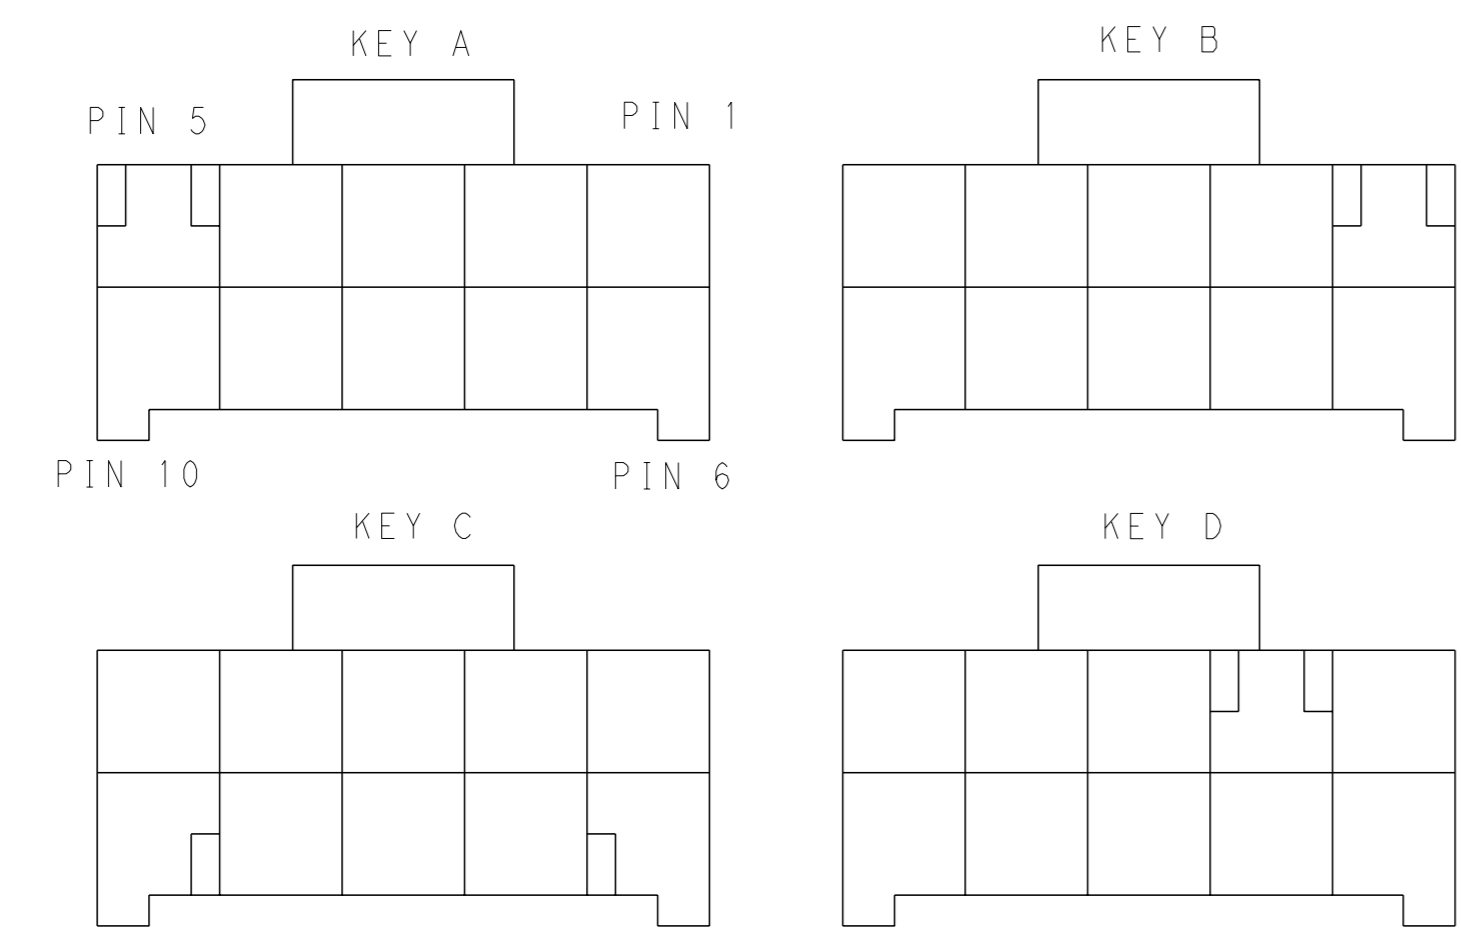

KEYING FOR 2*5 POS.

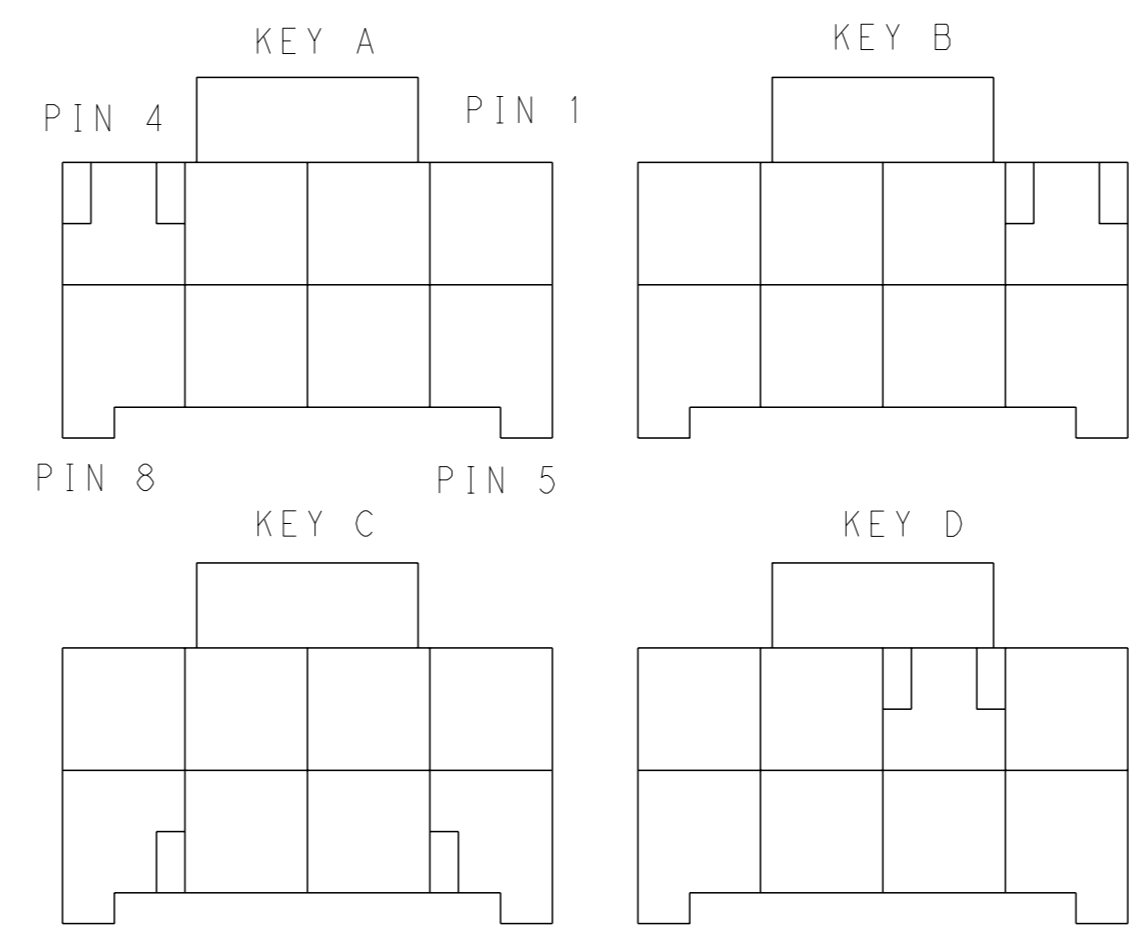



KEYING FOR 2*4 POS.

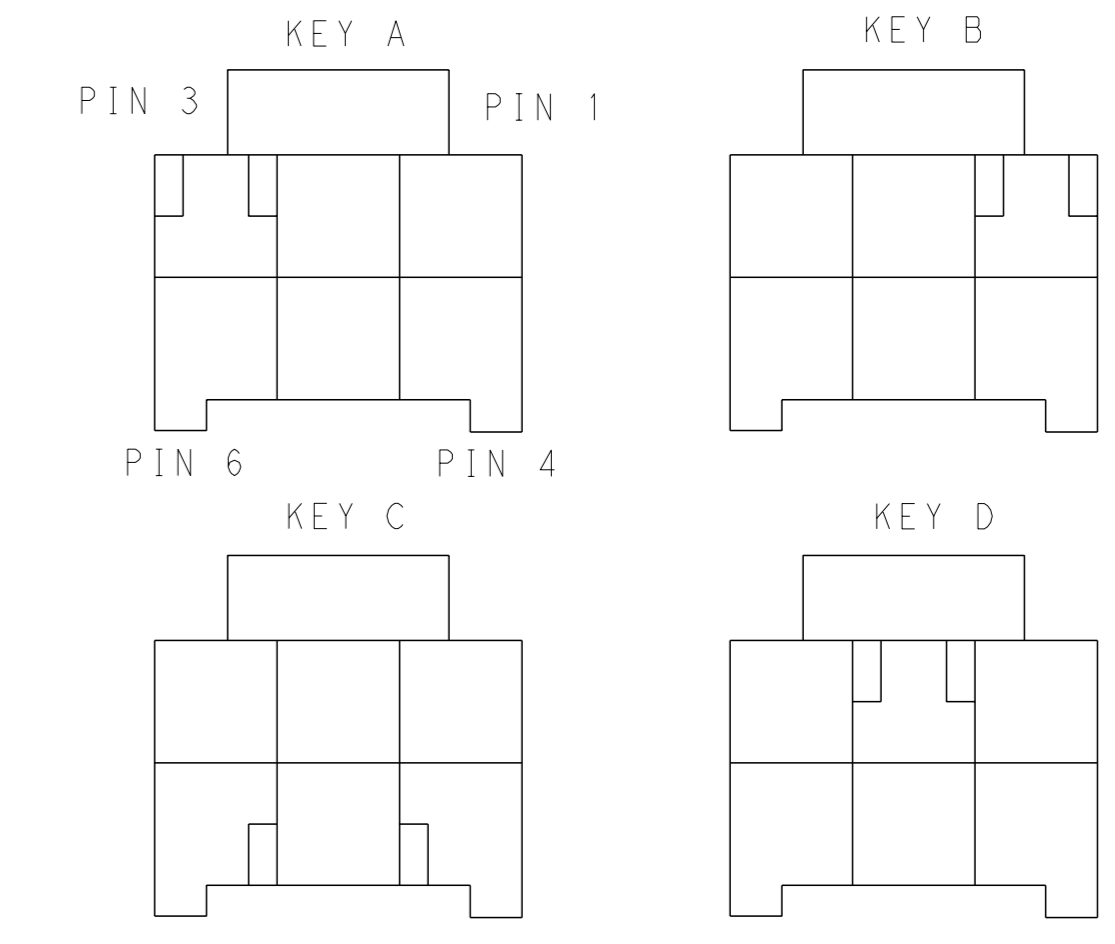


KEYING FOR 2*3 POS.

POS.	MATERIAL	KEY	P/N
2*6	LEVEL 1	KEY A	1-1971776-6
		KEY B	2-1971776-6
		KEY C	3-1971776-6
		KEY D	4-1971776-6
2*6	LEVEL 2	KEY A	5-1971776-6
		KEY B	6-1971776-6
		KEY C	7-1971776-6
		KEY D	8-1971776-6
2*5	LEVEL 1	KEY A	1-1971776-5
		KEY B	2-1971776-5
		KEY C	3-1971776-5
		KEY D	4-1971776-5
2*5	LEVEL 2	KEY A	5-1971776-5
		KEY B	6-1971776-5
		KEY C	7-1971776-5
		KEY D	8-1971776-5

POS.	MATERIAL	KEY	P/N
2*4	LEVEL 1	KEY A	1-1971776-4
		KEY B	2-1971776-4
		KEY C	3-1971776-4
		KEY D	4-1971776-4
2*4	LEVEL 2	KEY A	5-1971776-4
		KEY B	6-1971776-4
		KEY C	7-1971776-4
		KEY D	8-1971776-4
2*3	LEVEL 1	KEY A	1-1971776-3
		KEY B	2-1971776-3
		KEY C	3-1971776-3
		KEY D	4-1971776-3
2*3	LEVEL 2	KEY A	5-1971776-3
		KEY B	6-1971776-3
		KEY C	7-1971776-3
		KEY D	8-1971776-3

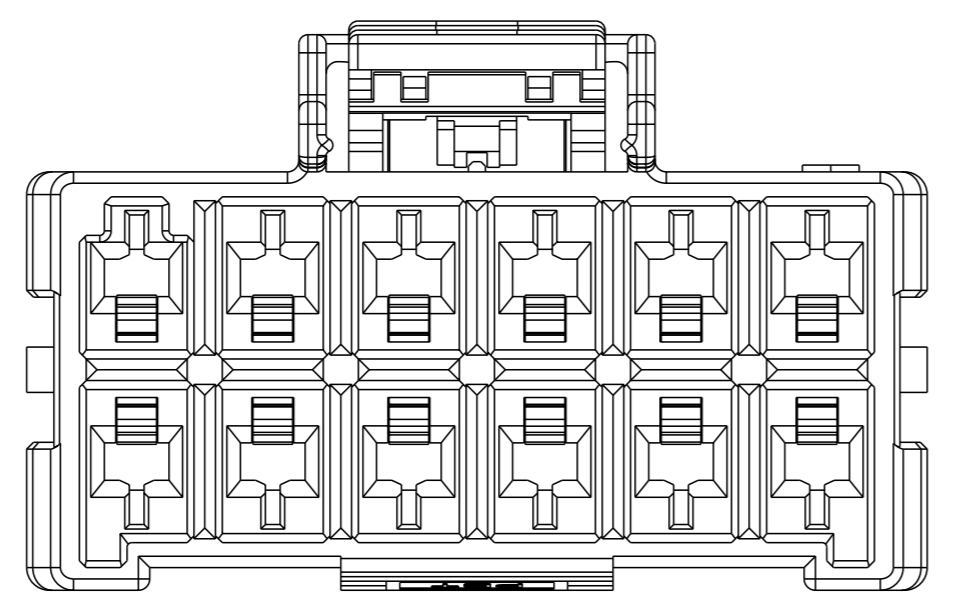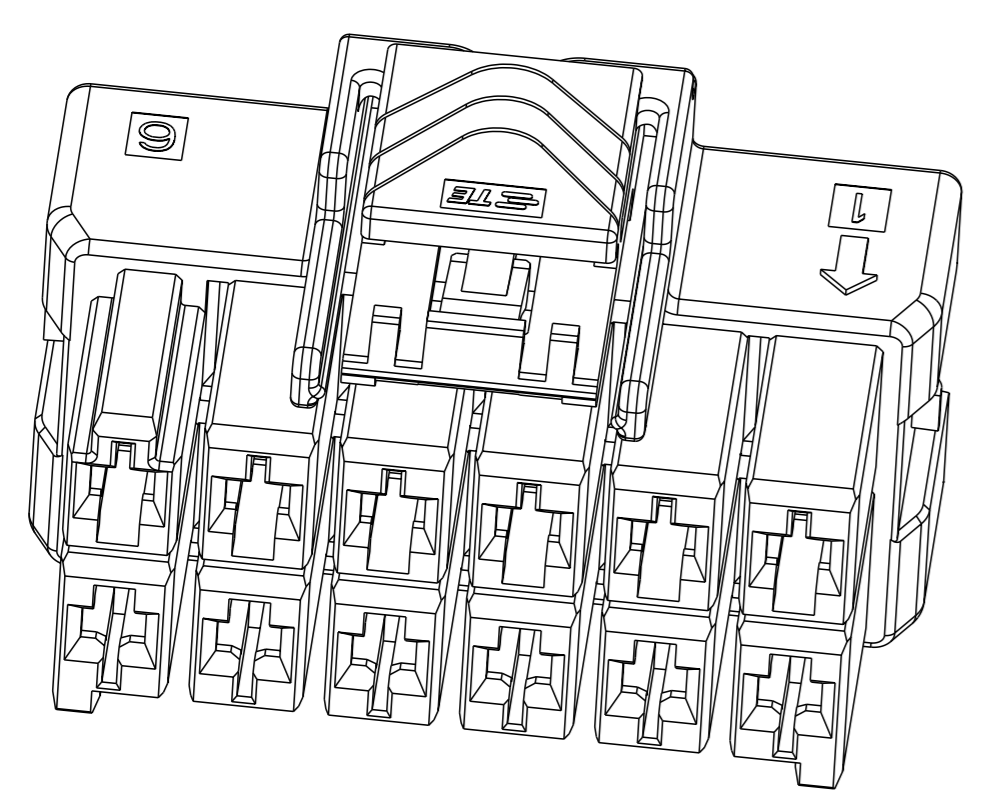

2*6 POSITIONS

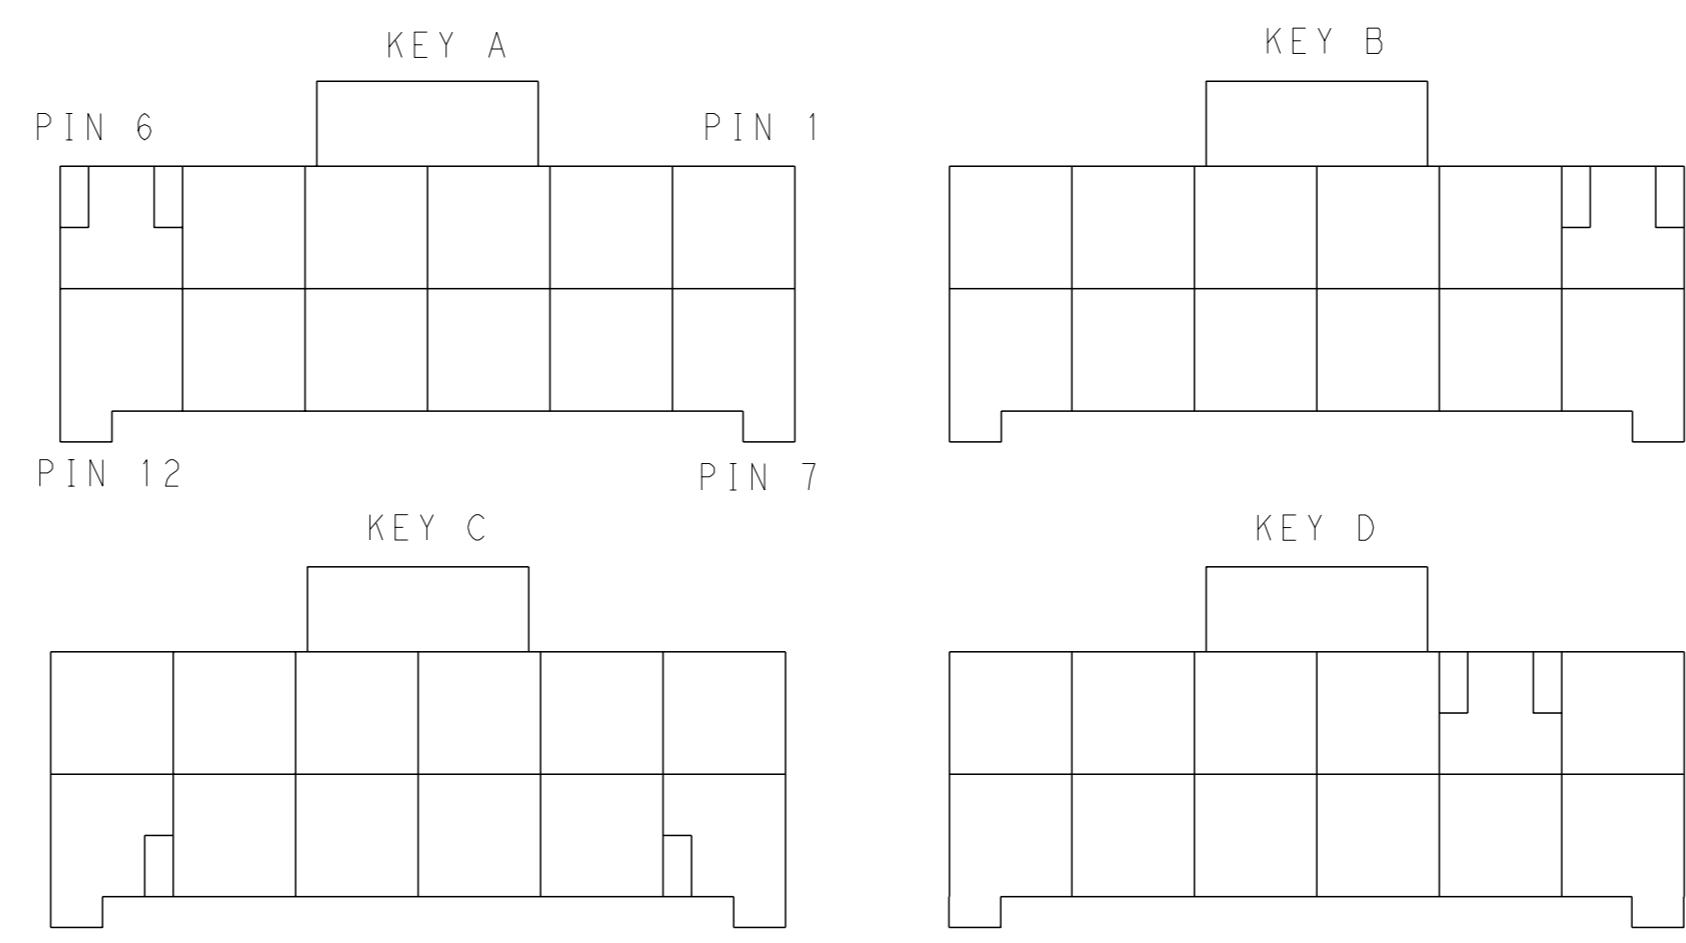

KEYING FOR 2*6 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		CHK TOMMY WU 09JUL2012	TE Connectivity PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK
DIMENSIONS: mm		CHK HAPYE WU 09JUL2012	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD YUHONG MAO 09JUL2012	NAME
0 PLC ±	1 PLC ±0.35	PRODUCT SPEC	SIZE CAGE CODE DRAWING NO
2 PLC ±0.25	3 PLC ±	APPLICATION SPEC	RESTRICTED TO
4 PLC ±	ANGLES FINISH	114-106118	A1 00779C=1971776
MATERIAL	FINISH	WEIGHT	SCALE 4:1 SHEET 2 OF 2 REV D
Customer Drawing			